




TEC-GUARD

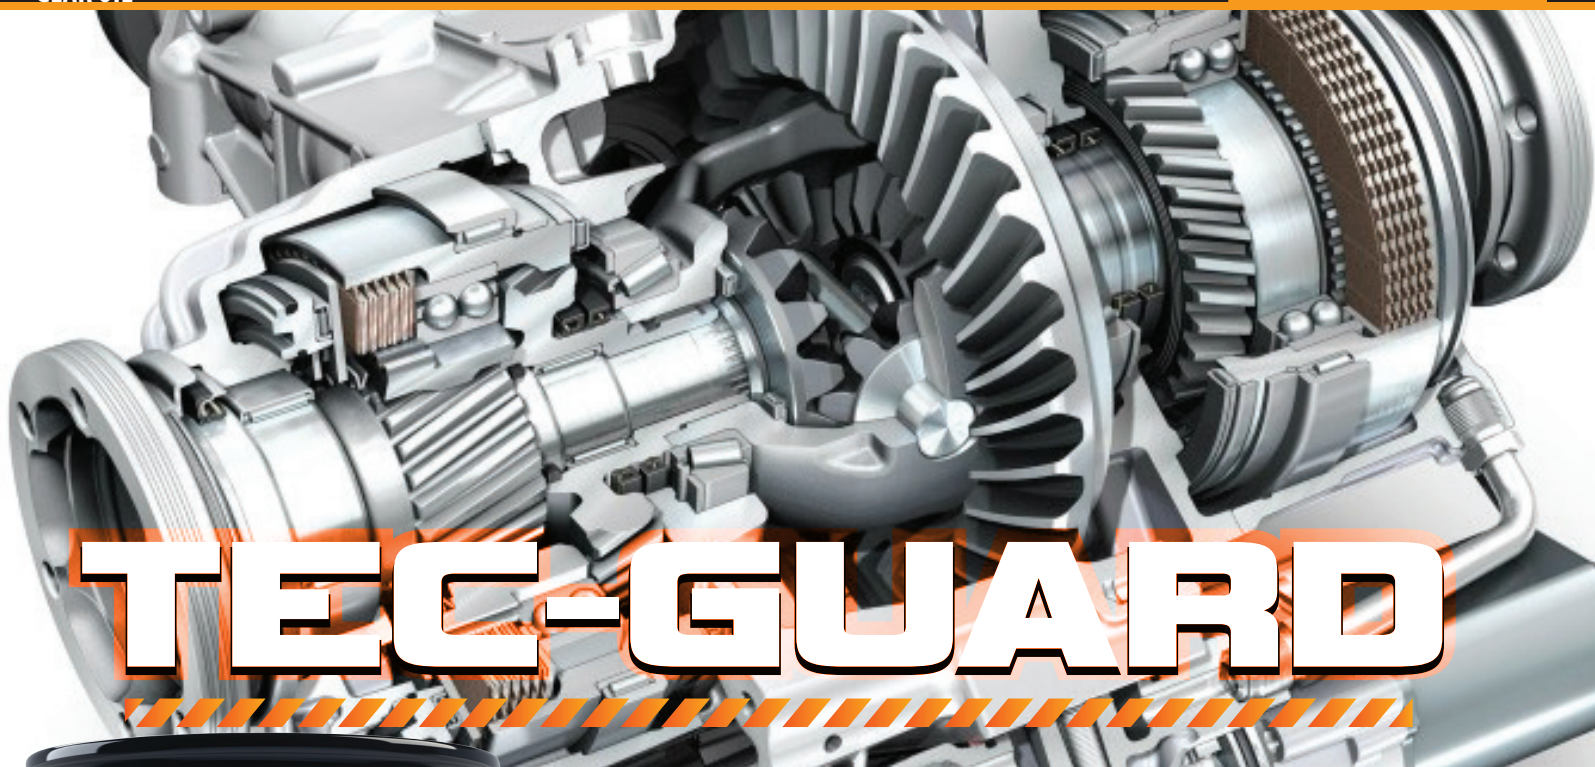

- Minimum Gear Wear
- Excellent Extreme Pressure Performance
- Excellent Water Shedding Properties
- High Viscosity Index
- Outstanding Rust and Corrosion Protection
- Excellent Foam Resistance
- Good Low Temperature Fluidity
- Non-Corrosive

EXTREME

TEC-GUARD EXTREME HIGH PERFORMANCE GEAR OILS

TEC-GUARD® Extreme High Performance Gear Oils are extreme pressure gear lubricants designed to meet the stringent requirements of API service designation GL-5 and Mack Trucks GO-J Specifications. TEC-GUARD® Extreme High Performance Gear Oils are engineered from high quality base stocks and premier additive technology.

TEC-GUARD® Extreme High Performance Gear Oils exhibit outstanding extreme pressure performance, anti-wear, corrosion resistance and rust preventive properties in heavy duty and conventional differentials found in passenger cars, light duty trucks, and heavy duty on-road and off-road equipment.

Meets or exceeds API GL-5, API MT-1, MIL-PRF-2105E, MIL-L-2105D, J2360, Mack GO-J

Test Method	
Viscosity, cSt @ 40°C	142.0
Viscosity, cSt @ 100°C	14.9
Viscosity Index	105
Specific Gravity 15.6C	.8810
Density, lbs/gal	7.32
Flash Point, °F	448
Pour Point, °C	-32
BROOKFIELD VISCOSITY, ASTM D 2983, CP	120,000 (-26°C)
FOAM TEST, ASTM D 892	PASS
COPPER CORROSION, ASTM D130	PASS

TEC-GUARD

400 S 14 Ave • Eldridge, IA 52748 • 800-522-1150 • www.tec-guard.com