




TEC-GUARD

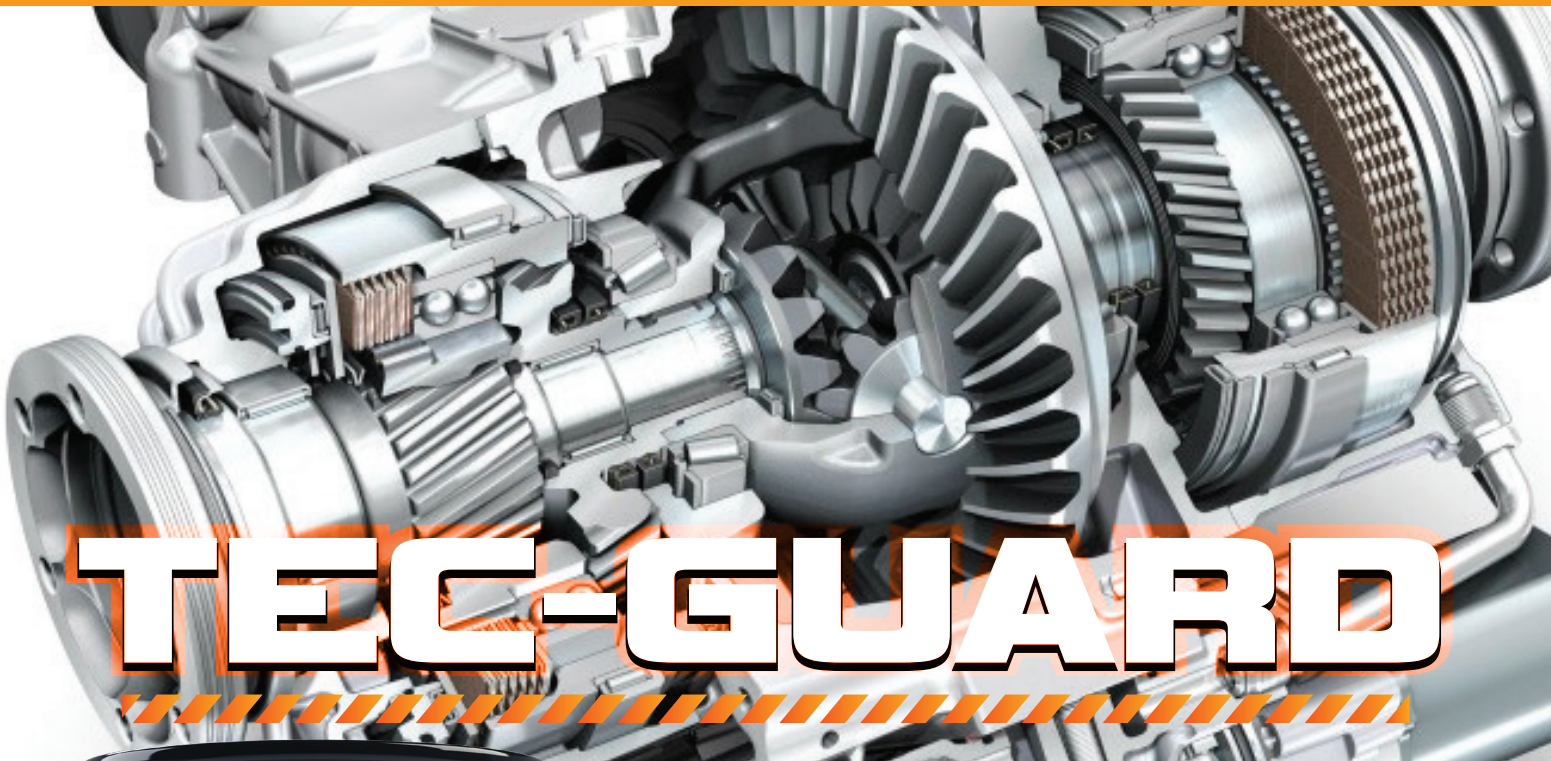

EXTREME

TEC-GUARD EXTREME FULL SYNTHETIC AT668

TEC-GUARD® Extreme Full Synthetic AT668 is a fully synthetic transmission fluid that is suitable for use when an application is calling for the Allison TES 668® specification, and is backwards compatible for applications recommending Allison TES 295®. The fluid is designed to meet the demanding requirements of modern heavy duty automatic transmissions. The synthetic base oil composition enables excellent performance even in some of the harshest of operating conditions. It offers outstanding gear shifting and power transfer performance. Versus conventional ATF fluids, the inherently high viscosity index and stability of TEC-GUARD® Extreme Full Synthetic AT668 helps protect against thermal breakdown at high operating temperatures, while still providing outstanding performance at sub-zero temperatures.

SUITABLE FOR USE:

Allison TES 668

Allison TES 295

- Enhanced, long-term frictional properties
- Exceptional thermal and oxidation stability.
- Outstanding film-strength and anti-wear properties
- Excellent low-temperature fluidity
- Exceptional shear stability
- Compatible with mineral ATF fluids

Test Method	
Density @ 15 C, kg/m3, ASTM d4052	836.2
Kinematic Viscosity @ 40 C, mm2/	36.5
Pour Point, °C	-54
Viscosity Index	154
Flash Point, °C (COC)	233
Brookfield Viscosity @ -40	11000
Kinematic Viscosity @ 100 C	6.85

TEC-GUARD

400 S 14 Ave • Eldridge, IA 52748 • 800-522-1150 • www.tec-guard.com